



LOKABO

LOKABO WINDOWS & DOORS
BRAND 2024

Z Series

Profile: High Precision Aluminum 6063-T6

Insulating Strip: 34mm Custom Flywing Strip

Sealant: Premium Integrated Bending EPDM

Hardware: Geman Siegenia + Custom anodized handle

Glazing: 5+19A+5 IG Tempered Glass

Corner: Glue Injection Screw Tight




LZ-N82 Inward Swing Window

Jamb Thickness: 82mm Sash Thickness: 92mm
Profile: Aluminum 6063-T6 Thickness>1.8mm
Surface: Tiger powder coating, 20 years lasting.
Color: Grey / Brown / Black / Gold
Insulating Strip: High Performance Flyswing 34mm Wide
Sealant: European Standard EPDM
Hardware: German Siegenia + Custom Anodized Handle
Optional: Belgium Sobinco Hinge + Sobinco Handle
Optional: German ROTO Child Safety Lock
Glazing: 5+19A+5 IG Tempered Glass
Optional: Tripple-Layer, Laminated Glass
Sash Range: $520 \leq \text{Width} \leq 750$ $655 \leq \text{Height} \leq 1800$

Corner Process: Custom Corner+45 Degree
Glue: German WEISS
Window Pillar Process: Custom Connector+PIN+Glue
Drainage: Isobaric Water Drainage


 **LOKABO**

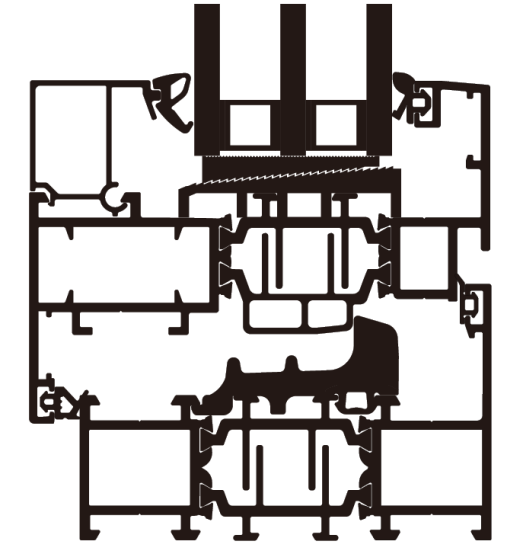

LZ-W82 Outward Swing Window

Jamb Thickness: 82mm Sash Thickness: 92mm
Profile: Aluminum 6063-T6 Thickness>1.8mm
Surface: Tiger powder coating, 20 years lasting.
Color: Grey / Brown / Black / Gold
Insulating Strip: High Performance Flyswing 34mm Wide
Sealant: European Standard EPDM
Hardware: German Siegenia + Custom Anodized Handle
Optional: CMECH Child Safety Lock
Glazing: 5+19A+5 IG Tempered Glass
Sash Range: 550≤Width≤700 655≤Height≤1500

 **LOKABO**

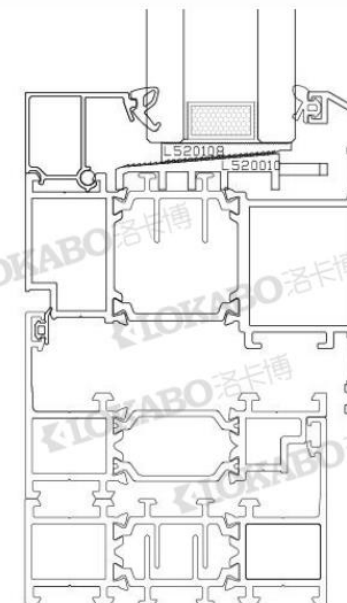

Corner Process: Custom Corner+45 Degree
Glue: German WEISS
Window Pillar Process: Custom
Connector+PIN+Glue
Drainage: Isobaric Water Drainage



LZ-NM82
Inward
Open
Door

Jamb Thickness: 82mm Sash Thickness: 92mm
Profile: Aluminum 6063-T6 Thickness>2.2mm
Surface: Tiger powder coating, 20 years lasting.
Color: Black
Insulating Strip: High Performance Flyswing 34mm Wide
Sealant: European Standard EPDM
Hardware: German G-U + Custom Anodized Handle
Optional: Belgium Sobinco Hardware + 3-section anti-theft hinge
Glazing: 5+19A+5 IG Tempered Glass
Optional: Tripple-Layer, Laminated Glass
Sash Range: 800mm≤Width≤1000mm 1800mm≤Height≤2800mm


Corner Process: Custom Corner+45 Degree

Glue: German WEISS

Window Pillar Process: Custom Connector+PIN+Glue

Drainage: Isobaric Water Drainage


Applications: Belcony Door, Backyard Garden Door

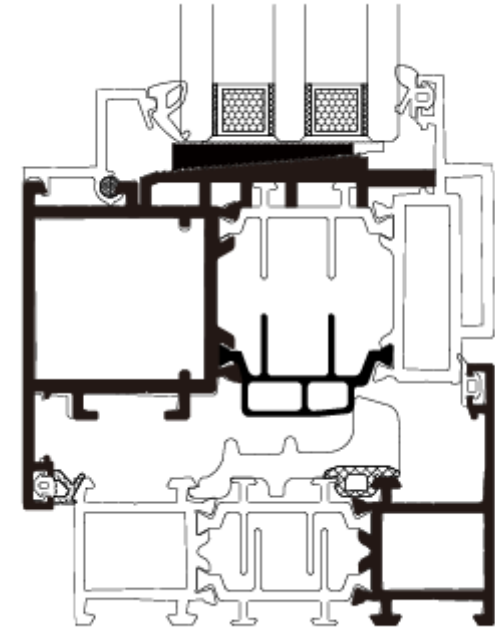

LZ-N115 Inward Swing Window

Jamb Thickness: 115mm Sash Thickness: 92mm
Profile: Aluminum 6063-T6 Thickness>1.8mm
Surface: Tiger powder coating, 20 years lasting.
Color: Grey / Brown / Black / Gold
Insulating Strip: High Performance Flyswing 34mm Wide
Sealant: European Standard EPDM
Hardware: German Siegenia + Custom Anodized Handle
Optional: Belgium Sobinco Hinge + Sobinco Handle
Optional: German ROTO Child Safety Lock
Glazing: 5+19A+5 IG Tempered Glass
Optional: Tripple-Layer, Laminated Glass
Screen: Built-in Screen / 14 mesh Stainless Steel mesh
Sash Range: 520≤Width≤750 655≤Height≤1800

Corner Process: Custom Corner+45 Degree
Glue: German WEISS
Window Pillar Process: Custom Connector+PIN+Glue
Drainage: Isobaric Water Drainage

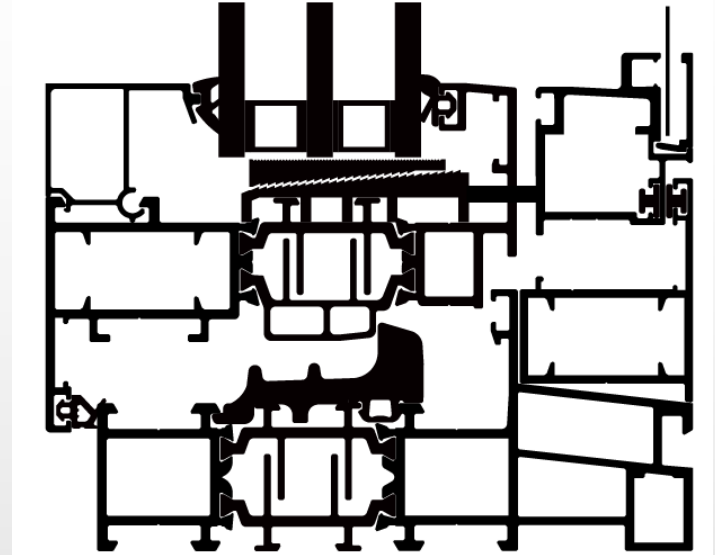


LZ-N166 Inward Swing Window

Jamb Thickness: 166mm Sash Thickness: 92mm
Profile: Aluminum 6063-T6 Thickness>1.8mm
Surface: Tiger powder coating, 20 years lasting.
Color: Black
Insulating Strip: High Performance Flyswing 34mm Wide
Sealant: European Standard EPDM
Hardware: German Siegenia + Custom Anodized Handle
Optional: Belgium Sobinco Hinge + Sobinco Handle
Optional: German ROTO Child Safety Lock
Glazing: 5+19A+5 IG Tempered Glass
Optional: Tripple-Layer, Laminated Glass
Sash Range: 620≤Width≤850 755≤Height≤1800

Corner Process: Custom Corner+45 Degree
Glue: German WEISS
Window Pillar Process: Custom Connector+PIN+Glue
Drainage: Isobaric Water Drainage

 **LOKABO**

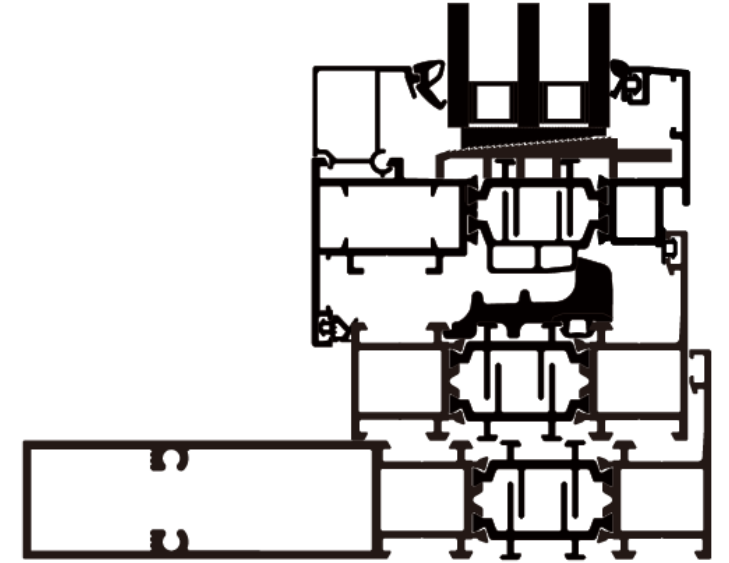

LZ-TM166

Lift Sliding Door

Jamb Thickness: 166mm Sash Thickness: 68mm

Profile: Aluminum 6063-T6 Thickness>2.2mm

Surface: Tiger powder coating, 20 years lasting.

Color: Black

Insulating Strip: High Performance Flyswing 34mm Wide

Sealant: European Standard EPDM


Hardware: German G-U + G-U Handle

Optional: Belgium Sobinco Hardware / Electric Motor Sliding Door+Face Recognition

Glazing: 5+19A+5 IG Tempered Glass

Sash Range: $800\text{mm} \leq \text{Width} \leq 1600\text{mm}$

$2000\text{mm} \leq \text{Height} \leq 2800\text{mm}$

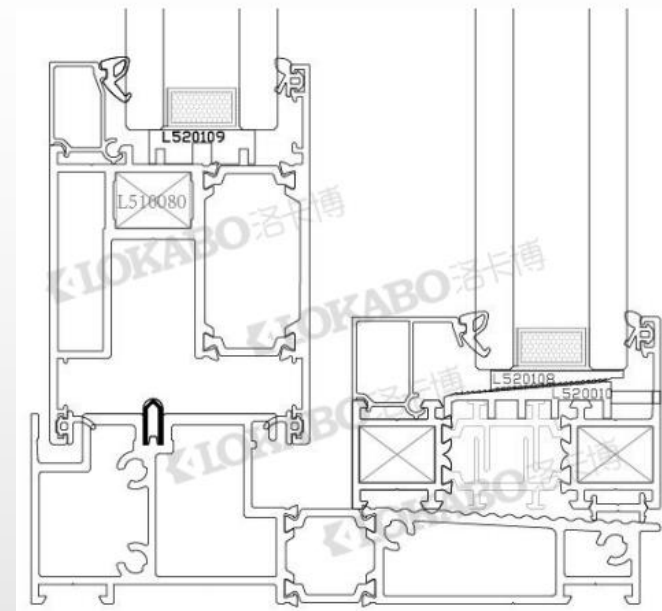


Corner Process: Custom Corner+45 Degree

Glue: German WEISS

Window Pillar Process: Custom Connector+PIN+Glue

Drainage: Isobaric Water Drainage

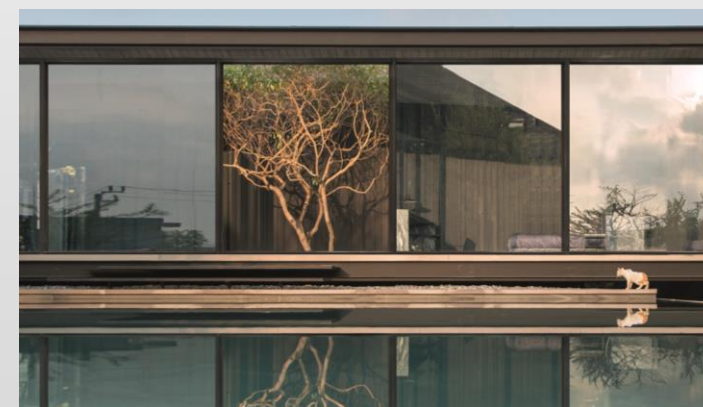

G Series

Profile: High Precision Aluminum 6063-T6

Insulating Strip: 34mm Custom Flywing Strip

Sealant: Premium Integrated Bending EPDM

Hardware: Geman Siegenia + Custom anodized handle

Glazing: 5+19A+5 IG Tempered Glass

Corner: Glue Injection Screw Tight




LG-N76 Inward Swing Window

Jamb Thickness: 76mm Sash Thickness: 86mm
Profile: Aluminum 6063-T6 Thickness>1.8mm
Surface: Tiger powder coating, 20 years lasting.
Color: Grey / Brown / Black / Gold
Insulating Strip: High Performance Flyswing 28mm Wide
Sealant: European Standard EPDM
Hardware: German Siegenia + Custom Anodized Handle
Optional: Belgium Sobinco Hinge + Sobinco Handle
Optional: German ROTO Child Safety Lock
Glazing: 5+19A+5 IG Tempered Glass
Optional: Tripple-Layer, Laminated Glass
Screen: Built-in Screen / 14 mesh Stainless Steel mesh
Sash Range: 550≤Width≤750 655≤Height≤1800

Corner Process: Custom Corner+45 Degree
Glue: German WEISS
Window Pillar Process: Custom Connector+PIN+Glue
Drainage: Isobaric Water Drainage


The logo for LOKABO, featuring a stylized red and black 'L' icon followed by the brand name in bold black capital letters.

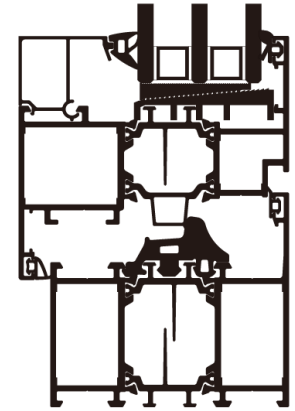

LG-W76 Out Swing Window

Jamb Thickness: 76mm Sash Thickness: 86mm
Profile: Aluminum 6063-T6 Thickness>1.8mm
Surface: Tiger powder coating, 20 years lasting.
Color: Grey / Brown / Black / Gold
Insulating Strip: High Performance Flyswing 28mm Wide
Sealant: European Standard EPDM
Hardware: German Siegenia + Custom Anodized Handle
Optional: CMECH Child Safety Lock
Glazing: 5+19A+5 IG Tempered Glass
Sash Range: 550≤Width≤750 655≤Height≤1800

 **LOKABO**

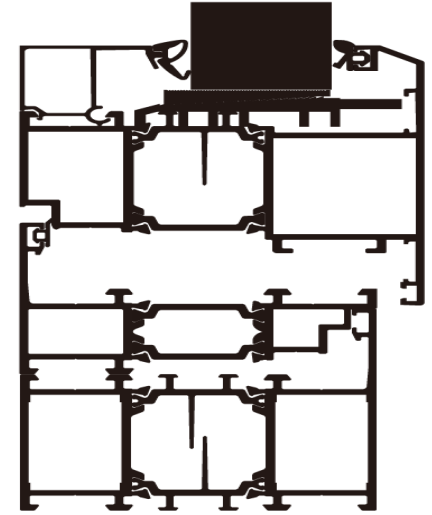


Corner Process: Custom Corner+45 Degree
Glue: German WEISS
Window Pillar Process: Custom Connector+PIN+Glue
Drainage: Isobaric Water Drainage



LG-WM76
Out
Swing
Door

Jamb Thickness: 76mm Sash Thickness: 86mm
Profile: Aluminum 6063-T6 Thickness>2.2mm
Surface: Tiger powder coating, 20 years lasting.
Color: Grey / Brown / Black / Gold
Insulating Strip: High Performance Flyswing 28mm Wide
Sealant: European Standard EPDM
Hardware: German G-U + Custom Stainless Steel Handle
Optional: Belgium Sobinco Hardware
Glazing: 5+19A+5 IG Tempered Glass
Optional: Tripple-Layer, Laminated Glass
Sash Range: 800mm≤Width≤1000mm 1800mm≤Height≤2600mm

Corner Process: Custom Corner+45 Degree
Glue: German WEISS
Window Pillar Process: Custom Connector+PIN+Glue
Drainage: Isobaric Water Drainage


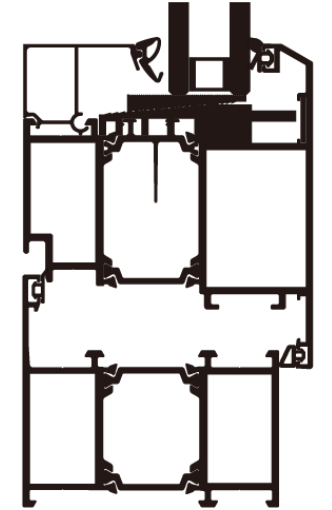


LG-N86 In Swing Window

Jamb Thickness: 86mm Sash Thickness: 96mm
Profile: Aluminum 6063-T6 Thickness>1.8mm
Surface: Tiger powder coating, 20 years lasting.
Color: Grey / Brown / Black / Gold
Insulating Strip: High Performance Flyswing 38mm Wide
Sealant: European Standard EPDM
Hardware: German Siegenia + Custom Anodized Handle
Optional: Belgium Sobinco Hinge + Sobinco Handle
Optional: German ROTO Child Safety Lock
Glazing: 5+15A+5+15A+5 Tripple Layer IG Tempered Glass
Optional: LOW-E, Laminated Glass
Optional: Built-in Screen / 14 mesh Stainless Steel mesh
Sash Range: 520≤Width≤750 655≤Height≤1800

Corner Process: Custom Corner+45 Degree
Glue: German WEISS
Window Pillar Process: Custom Connector+PIN+Glue
Drainage: Isobaric Water Drainage


 **LOKABO**

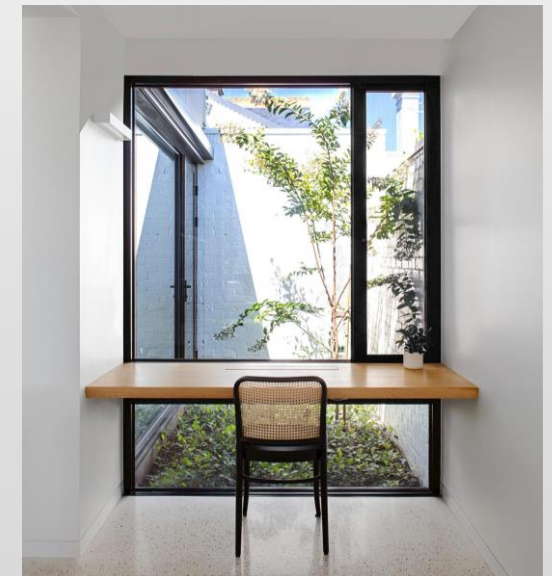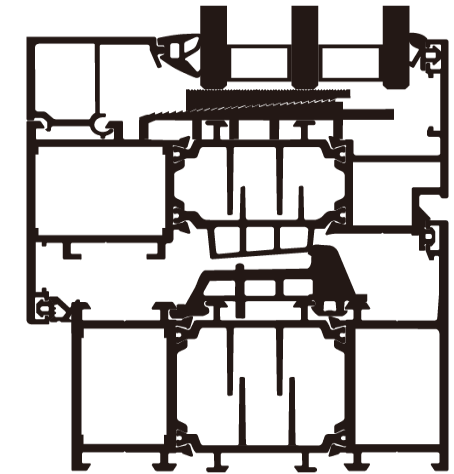

LG-PM78 Casement Door

Jamb Thickness: 78mm Sash Thickness: 78mm
Profile: Aluminum 6063-T6 Thickness>2.2mm
Surface: Tiger powder coating, 20 years lasting.
Color: Grey / Brown / Black / Gold
Insulating Strip: High Performance Flyswing 28mm Wide
Sealant: European Standard EPDM
Hardware: Sobinco Hardware + 3 Section Hinge + Custom Stainless Steel Handle
Optional: Belgium Sobinco Hidden Hinge / Electric Door Fingerprint
Glazing: 5+19A+5 IG Tempered Glass
Optional: Tripple Layer, LOW-E, Laminated Glass
Sash Range: 1000≤Width≤1300 2500≤Height≤3000

 **LOKABO**

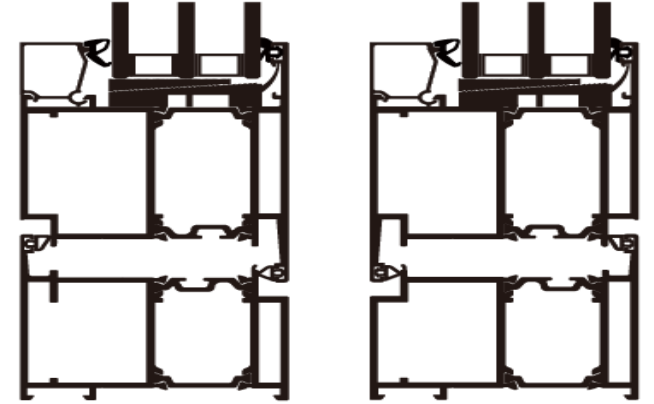

外开

内开

Corner Process: Custom Corner+45 Degree
Glue: German WEISS
Window Pillar Process: Custom Connector+PIN+Glue
Drainage: Isobaric Water Drainage



K Series

Profile: High Precision Aluminum 6063-T6

Insulating Strip: German Ensinger Multiple Chamber Strip

Sealant: German Imported Premium EPDM

Hardware: Belgium Sobinco

Glazing: 5+19A+5 IG Tempered Glass

Corner: Glue Injection Screw-Tight

Character: Slim Design, Elegant




LK-N72 In Swing Window

Jamb Thickness: 72mm Sash Thickness: 82mm
Profile: Aluminum 6063-T6 Thickness>1.8mm
Surface: Tiger powder coating, 20 years lasting.
Color: Grey / Brown / Black / Gold
Insulating Strip: German Ensinger 24mm Multiple Chamber Strip
Sealant: German Imported EPDM
Hardware: Belgium Sobinco + Custom Anodized Handle
Optional: Belgium Sobinco Baseless Handle
Optional: German ROTO Child Safety Lock
Glazing: 5+19A+5 IG Tempered Glass
Optional: Tripple Layer, LOW-E, Laminated Glass
Sash Range: 520≤Width≤750 655≤Height≤1800


Corner Process: Custom Corner+45 Degree
Glue: German WEISS
Window Pillar Process: Custom Connector+PIN+Glue
Drainage: Isobaric Water Drainage

The logo for LOKABO, featuring a stylized red and white 'L' icon followed by the brand name in bold black capital letters.

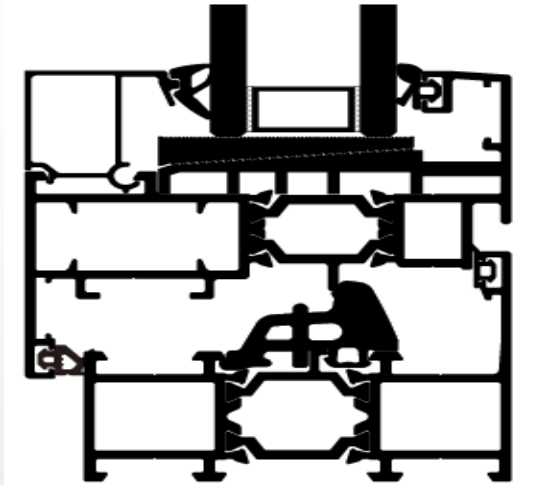

LK-NM72 Inward Swing Door

Jamb Thickness: 72mm Sash Thickness: 82mm
Profile: Aluminum 6063-T6 Thickness>2.2mm
Surface: Tiger powder coating, 20 years lasting.
Color: Grey / Brown / Black / Gold
Insulating Strip: German Ensinger 24mm Multiple Chamber Strip
Sealant: German Imported EPDM
Hardware: Belgium Sobinco + Custom Anodized Handle
Optional: Belgium Sobinco Baseless Handle
Glazing: 5+19A+5 IG Tempered Glass
Optional: Tripple Layer, LOW-E, Laminated Glass
Sash Range: $800 \leq \text{Width} \leq 1000$ $2000 \leq \text{Height} \leq 2800$

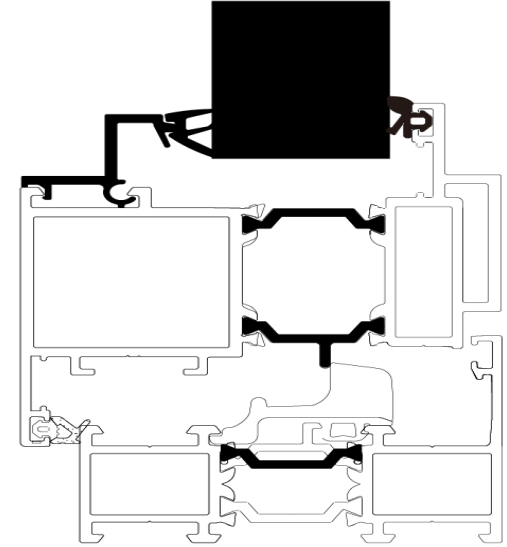

Corner Process: Custom Corner+45 Degree
Glue: German WEISS
Window Pillar Process: Custom Connector+PIN+Glue
Drainage: Isobaric Water Drainage




LK-N82 In Swing Window

Jamb Thickness: 82mm Sash Thickness: 92mm
Profile: Aluminum 6063-T6 Thickness>1.8mm
Surface: Tiger powder coating, 20 years lasting.
Color: Grey / Brown / Black / Gold
Insulating Strip: German Ensinger 34mm Multiple Chamber Strip
Sealant: German Imported EPDM
Hardware: Belgium Sobinco + Custom Anodized Handle
Optional: Belgium Sobinco Baseless Handle
Optional: German ROTO Child Safety Lock
Glazing: 5+19A+5 IG Tempered Glass
Optional: Tripple Layer, LOW-E, Laminated Glass
Sash Range: 520≤Width≤750 655≤Height≤1800

Corner Process: Custom Corner+45 Degree
Glue: German WEISS
Window Pillar Process: Custom Connector+PIN+Glue
Drainage: Isobaric Water Drainage

The logo for LOKABO, featuring a stylized red and black 'L' icon followed by the brand name in bold black capital letters.

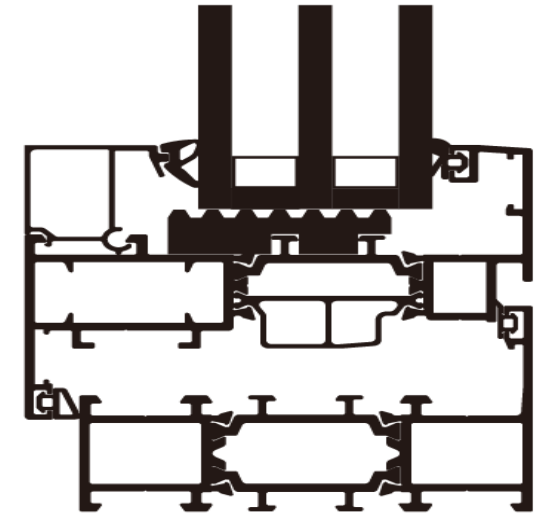


LK-N105 Inward Swing Window

Jamb Thickness: 105mm Sash Thickness: 82mm
Profile: Aluminum 6063-T6 Thickness>1.8mm
Surface: Tiger powder coating, 20 years lasting.
Color: Grey / Brown / Black / Gold
Insulating Strip: German Ensinger 24mm Multiple Chamber Strip
Sealant: German Imported EPDM
Hardware: Belgium Sobinco + Custom Anodized Handle
Optional: German ROTO Child Safety Lock
Optional: Belgium Sobinco Baseless Handle
Glazing: 5+19A+5 IG Tempered Glass
Optional: Tripple Layer, LOW-E, Laminated Glass
Screen: Built-in Screen / 14 mesh Stainless Steel mesh
Sash Range: 520≤Width≤750 655≤Height≤1800

Corner Process: Custom Corner+45 Degree
Glue: German WEISS
Window Pillar Process: Custom Connector+PIN+Glue
Drainage: Isobaric Water Drainage

 **LOKABO**

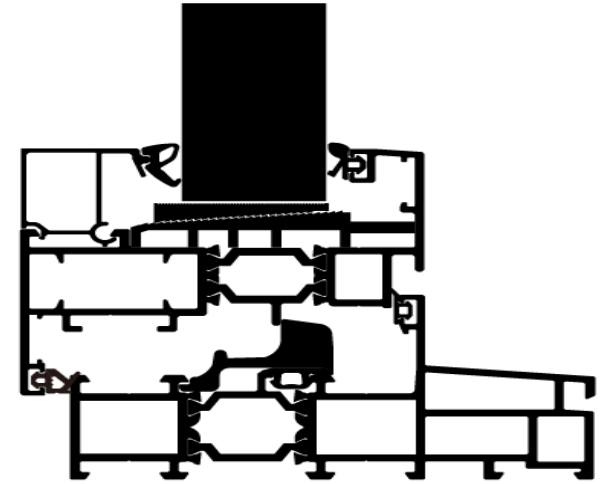


LK-W105 Out Swing Window

Jamb Thickness: 105mm Sash Thickness: 82mm
Profile: Aluminum 6063-T6 Thickness>1.8mm
Surface: Tiger powder coating, 20 years lasting.
Color: Grey / Brown / Black / Gold
Insulating Strip: German Ensinger 24mm Multiple Chamber Strip
Sealant: German Imported EPDM
Hardware: Italy Savio Hardware + Custom Anodized Handle
Optional: German ROTO Child Safety Lock
Glazing: 5+19A+5 IG Tempered Glass
Optional: Tripple Layer, LOW-E, Laminated Glass
Screen: Built-in Screen / 14 mesh Stainless Steel mesh
Sash Range: $520 \leq \text{Width} \leq 700$ $655 \leq \text{Height} \leq 1500$


Corner Process: Custom Corner+45 Degree
Glue: German WEISS
Window Pillar Process: Custom Connector+PIN+Glue
Drainage: Isobaric Water Drainage

 **LOKABO**

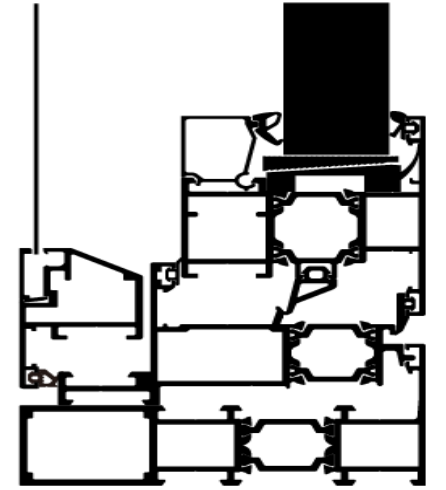

LK-NYS50
InSwing
Hidden
Sash
Window

Jamb Thickness: 115mm Sash Thickness: 97mm
Profile: Aluminum 6063-T6 Thickness>1.8mm
Surface: Tiger powder coating, 20 years lasting.
Color: Grey / Brown / Black / Gold
Insulating Strip: German Ensinger 20mm Multiple Chamber Strip
Sealant: German Imported EPDM
Hardware: German Siegenia + Custom Anodized Handle
Optional: German ROTO Child Safety Lock
Glazing: 6+19A+6 IG Tempered Glass
Optional: Tripple Layer, LOW-E, Laminated Glass
Sash Range: 550≤Width≤750 650≤Height≤1800

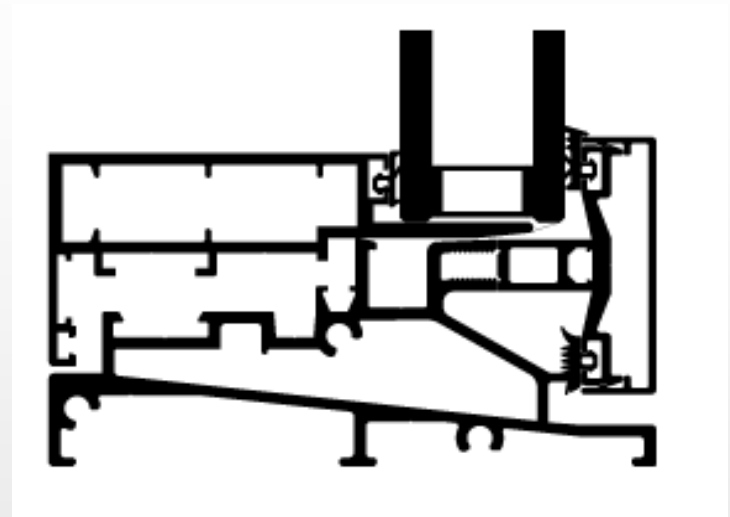


Corner Process: Custom Corner+45 Degree
Glue: German WEISS
Window Pillar Process: Custom Connector+PIN+Glue
Drainage: Isobaric Water Drainage



LK-NM138 InSwing Door

Jamb Thickness: 138mm Sash Thickness: 83mm
Profile: Aluminum 6063-T6 Thickness>2.2mm
Surface: Tiger powder coating, 20 years lasting.
Color: Grey / Brown / Black / Gold
Insulating Strip: German Ensinger 24mm Multiple Chamber Strip
Sealant: German Imported EPDM
Hardware: Belgium Sobinco + Custom Stainless Steel Handle
Optional: Sobinco Baseless Handle
Glazing: 5+19A+5 IG Tempered Glass
Optional: Tripple Layer, LOW-E, Laminated Glass
Sash Range: $800 \leq \text{Width} \leq 1000$ $2000 \leq \text{Height} \leq 2800$

 **LOKABO**

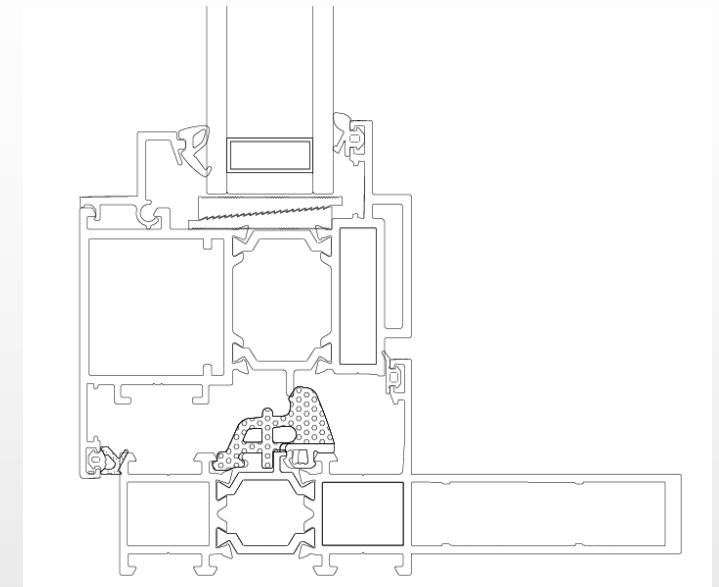


Corner Process: Custom Corner+45 Degree
Glue: German WEISS
Window Pillar Process: Custom Connector+PIN+Glue
Drainage: Isobaric Water Drainage



LK-TM145 Lift Sliding Door

Jamb Thickness: 145mm Sash Thickness: 55mm
Profile: Aluminum 6063-T6 Thickness>2.2mm
Surface: Tiger powder coating, 20 years lasting.
Color: Grey / Brown / Black / Gold
Insulating Strip: German Ensinger 24mm Multiple Chamber Strip
Sealant: German Imported EPDM
Hardware: Begium Sobinco + Custom Stainless Steel Handle
Optional: Sobinco Baseless Handle
Glazing: 5+19A+5 IG Tempered Glass
Optional: Tripple Layer, LOW-E, Laminated Glass
Sash Range: $800 \leq \text{Width} \leq 1600$ $1800 \leq \text{Height} \leq 2800$

 **LOKABO**

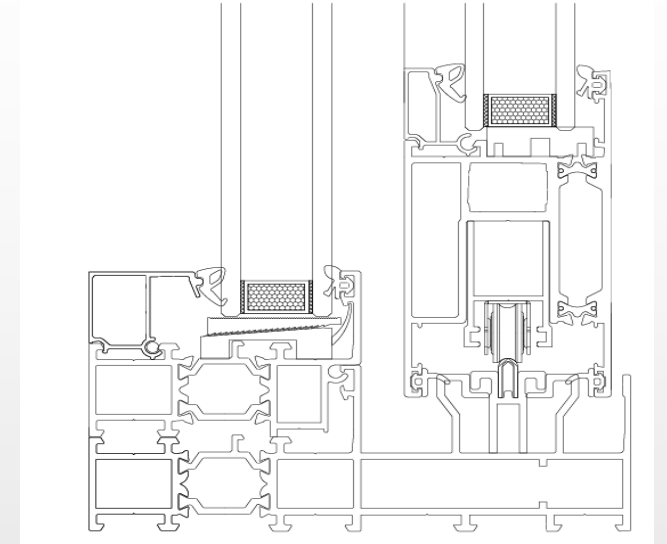

Corner Process: Custom Corner+45 Degree
Glue: German WEISS
Window Pillar Process: Custom Connector+PIN+Glue
Drainage: Isobaric Water Drainage



PRODUCTION LINE/ ADVANCED STNADARD



2000T Profile Pressing



Paiping



CNC



Strip Pressing



Saw Machine



TOP SUPPLIERS



CUSTOM CORNER






90° NO VERTICAL
COLUMN ANGLE

LOKABO WINDOWS & DOORS
BRAND 2024

THE GROUND
HORIZONTAL
SLIDING WINDOW

LOKABO WINDOWS & DOORS
BRAND 2024



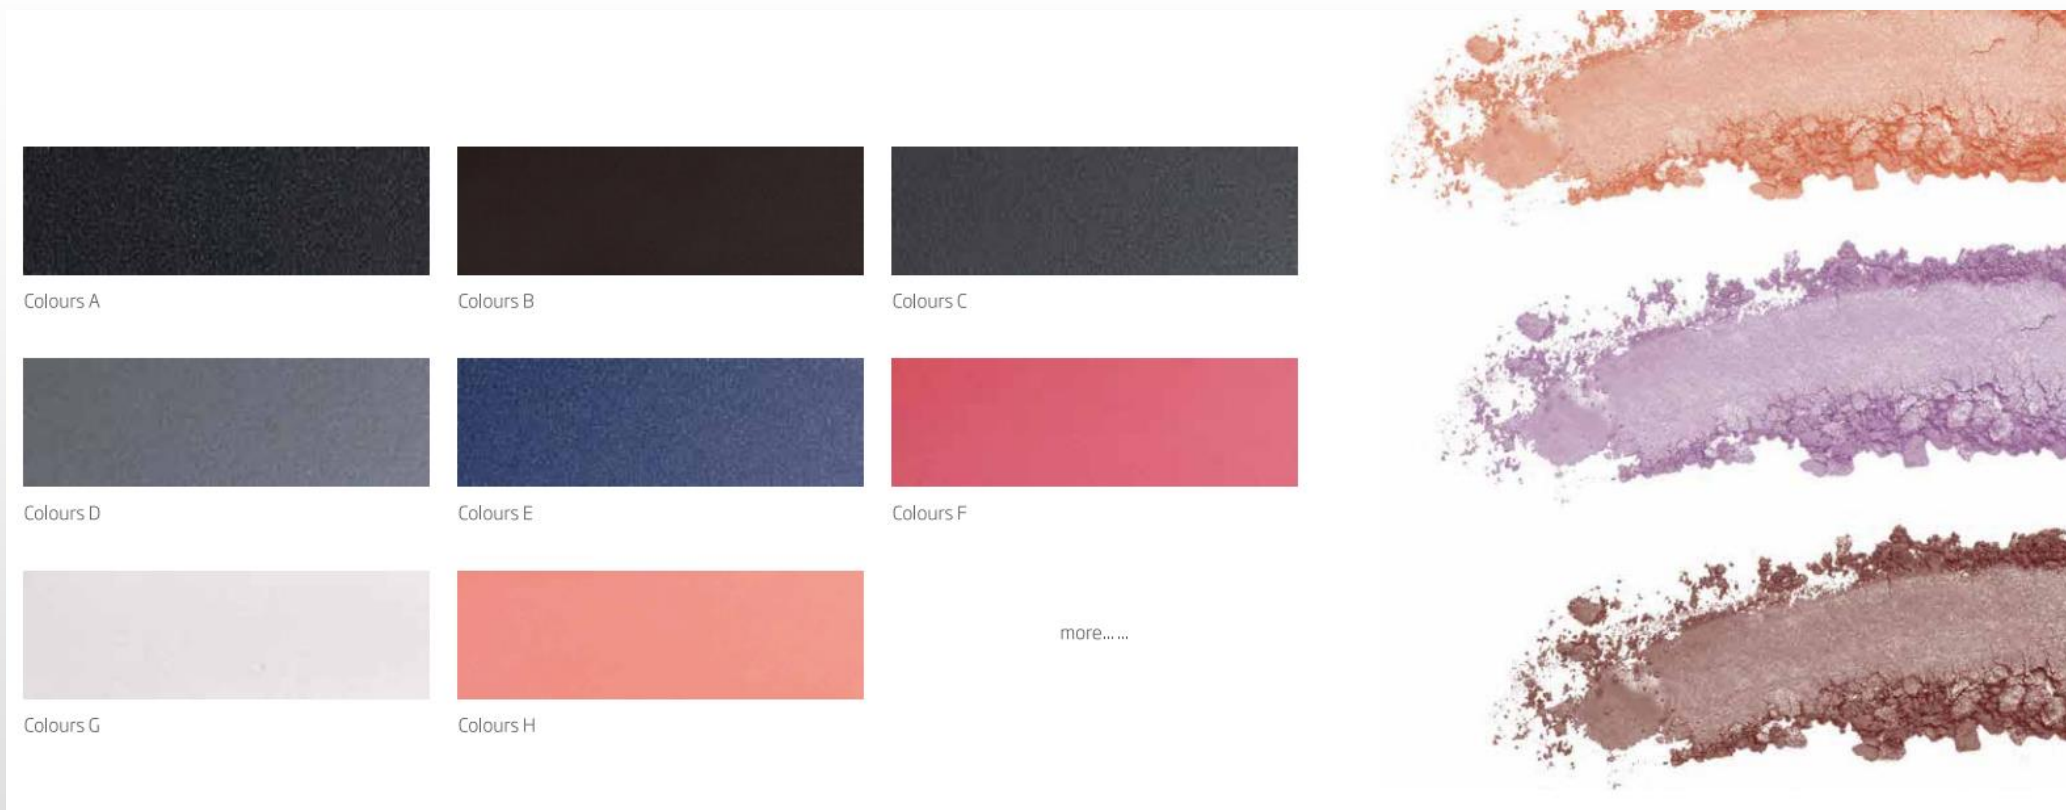

PERSONALIZED COLOR CUSTOMIZATION

LOKABO

SALES@LOKABO.COM